

Technical data sheet

341-024D-03

Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor **3 Nm**
- Torque Spring **3 Nm**
- Nominal Voltage **24 VAC/DC**
- Control **2- Point**
- Valve size **up to approx 0,6 m²**
- Damper shaft **Clamp**
 ∅ 13 mm/ Ø 16,5 mm



Technical data

Nominal voltage	Nominal voltage	24 VAC (50/60Hz), 24 VDC
	Nominal voltage range	19...29 VAC/DC
	Power consumption Motor (Motion)	5,0 W
	Power consumption Standby (end position)	1,5 W
	Wire sizing	7,5 VA
	Control	2 Point
	Position feedback	-
	Auxiliary switch	-
	Contact load	-
	Switching point	-
Functional data	Connection Motor	Cable 1000 mm, 2 x 0,75 mm² (halogen free)
	Connection Auxiliary switch	-
	Connection GUAC	-
	Torque Motor	>3 Nm [27 in lb]
	Torque Spring	>3 Nm [27 in lb]
	Synchronised speed	-
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<40 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<45 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp ∅ 13 mm/ Ø 16,5 mm
	Position indication	mechanical with pointer

Technical data

Functional data	Service life	>60.000 cycles (0°...+95°...0°)
Safety	Protection class	III (low voltage safety current)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	0,8 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C [-22°F...+122°F]
	Storage temperature	-30°C...+80°C [-22°F...+176°F]
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
Dimensions/ Weight	Dimensions	145 x 75 x 70 mm [5.71 x 2.95 x 2.76 in]
	Weight	ca. 1.200 g [2.65 lb]

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2), the actuator moves to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted the actuator is moving back to position 0 by the spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.


Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override


The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.

Connection / Safety remarks

**Safety remarks**

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

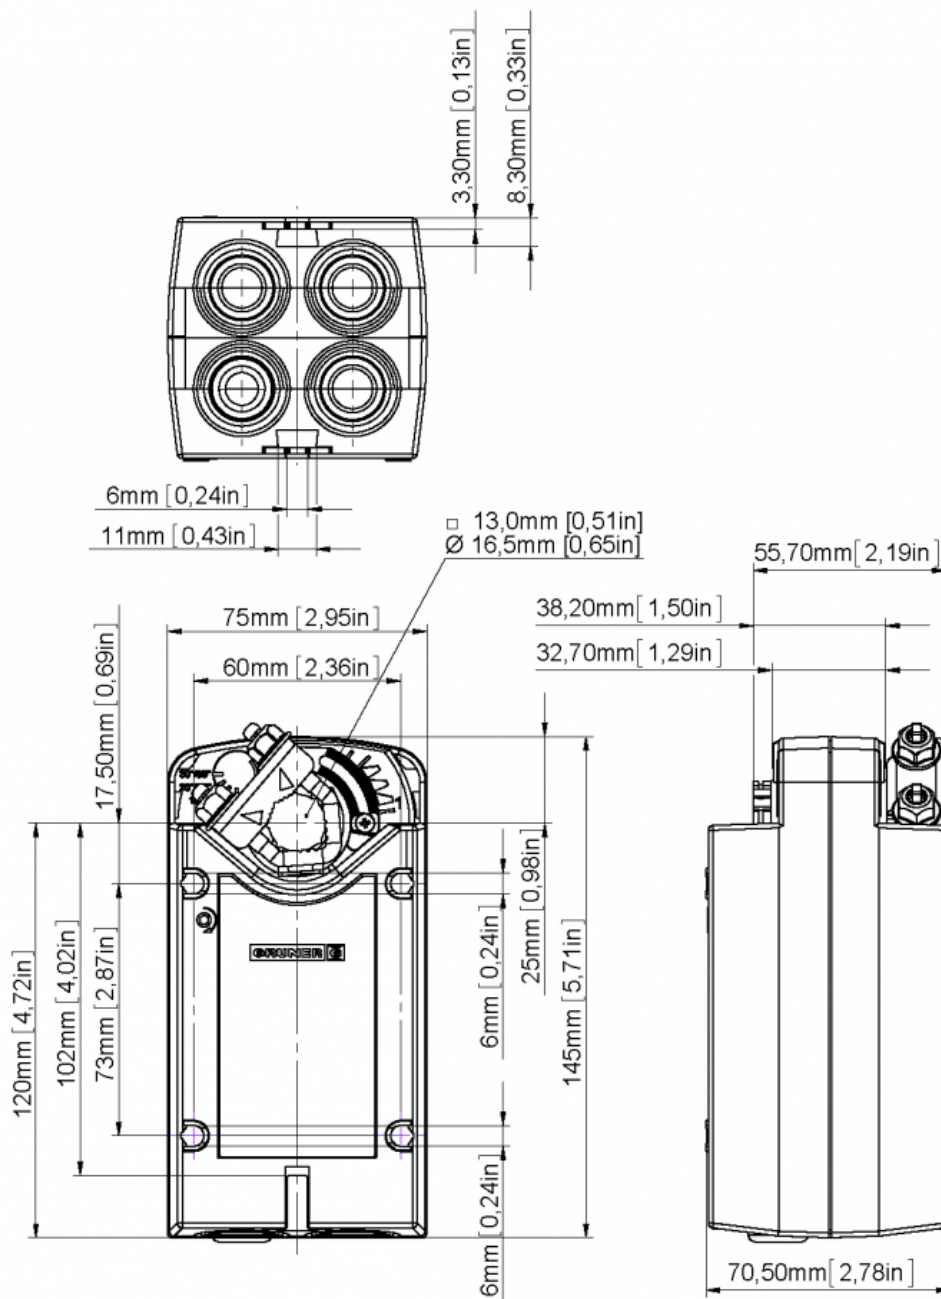



Technical data sheet

341-230D-03

Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor **3 Nm**
- Torque Spring **3 Nm**
- Nominal Voltage **230 VAC/DC**
- Control **2- Point**
- Valve size **up to approx 0,6 m²**
- Damper shaft **Clamp**
 ∅ 13 mm/ Ø 16,5 mm



Technical data

Nominal voltage	Nominal voltage	230 VAC (50/60Hz), 230 VDC
	Nominal voltage range	85...265 VAC/DC
	Power consumption Motor (Motion)	4 W
	Power consumption Standby (end position)	1,5 W
	Wire sizing	9 VA
	Control	2 Point
	Position feedback	-
	Auxiliary switch	-
	Contact load	-
	Switching point	-
Functional data	Connection Motor	Cable 1000 mm, 2 x 0,75 mm² (halogen free)
	Connection Auxiliary switch	-
	Connection GUAC	-
	Torque Motor	>3 Nm
	Torque Spring	>3 Nm
	Synchronised speed	-
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<40 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<45 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp ∅ 13 mm/ Ø 16,5 mm
	Position indication	mechanical with pointer

Technical data

Functional data	Service life	>60.000 cycles (0°...+95°...0°)
Safety	Protection class	II (double insulation)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	4 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C
	Storage temperature	-30°C...+80°C
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
Dimensions/ Weight	Dimensions	145 x 75 x 70 mm
	Weight	ca. 1.200g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2), the actuator moves to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted the actuator is moving back to position 0 by the spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.


Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override


The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.

Connection / Safety remarks

**Safety remarks**

- Attention mains voltage
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

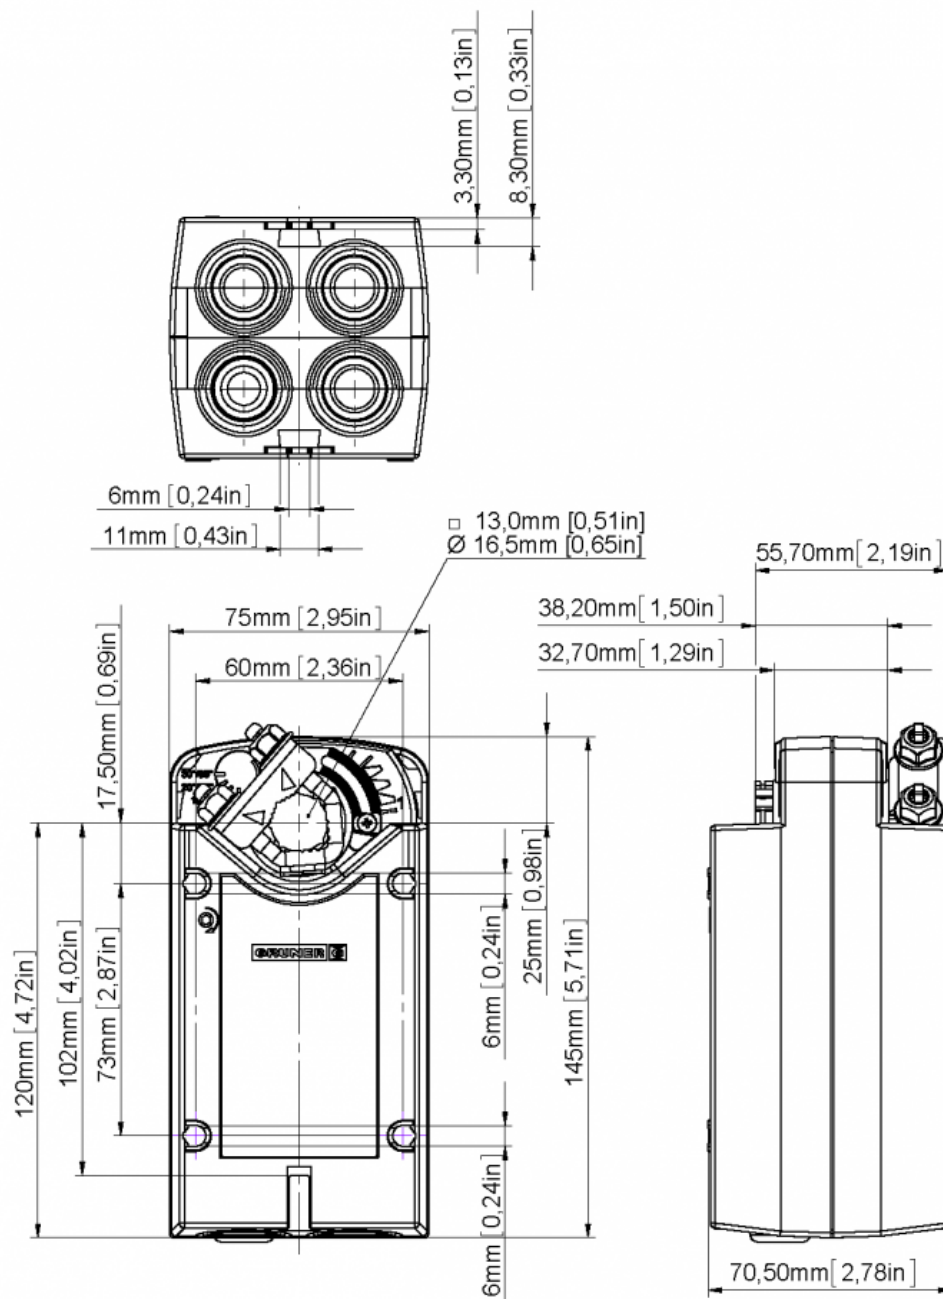



Technical data sheet

341-230D-03-S2

Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor **3 Nm**
- Torque Spring **3 Nm**
- Nominal Voltage **230 VAC/DC**
- Control **2- Point**
- Auxiliary switch **2x interdependent adjustable**
- Valve size **up to approx 0,6 m²**
- Damper shaft **Clamp**
∅ 13 mm/ Ø 16,5 mm



Technical data

Nominal voltage	Nominal voltage	230 VAC (50/60Hz), 230 VDC
	Nominal voltage range	85...265 VAC/DC
	Power consumption Motor (Motion)	4,5 W
	Power consumption Standby (end position)	1,5 W
	Wire sizing	9 VA
	Control	2 Point
	Position feedback	-
	Auxiliary switch	2 x SPDT (Ag)
	Contact load	5 (2,5) A, 250 VAC
	Switching point	0°...30° ~ 65°...95°
Functional data	Connection Motor	Cable 1000 mm, 2 x 0,75 mm² (halogen free)
	Connection Auxiliary switch	Cable 1000 mm, 6 x 0,75 mm² (halogen free)
	Connection GUAC	-
	Torque Motor	>3 Nm
	Torque Spring	>3 Nm
	Synchronised speed	-
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<40 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<45 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp ∅ 13 mm/ Ø 16,5 mm
	Position indication	mechanical with pointer

Technical data

Functional data	Service life	>60.000 cycles (0°...+95°...0°)
Safety	Protection class	II (double insulation)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	4 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C
	Storage temperature	-30°C...+80°C
Dimensions/ Weight	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
	Dimensions	145 x 75 x 70 mm
	Weight	ca. 1.200g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2), the actuator moves to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted the actuator is moving back to position 0 by the spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.

Signaling


The two integrated auxiliary switches are interdependent adjustable (S1: 0°...30° ~ S2: 65°...95°). These are activated corresponding to the adjusted angle. The damper position can be checked by the mechanical pointer.

Direct mounting



Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override

The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.




Connection / Safety remarks

**Safety remarks**

- Attention mains voltage
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

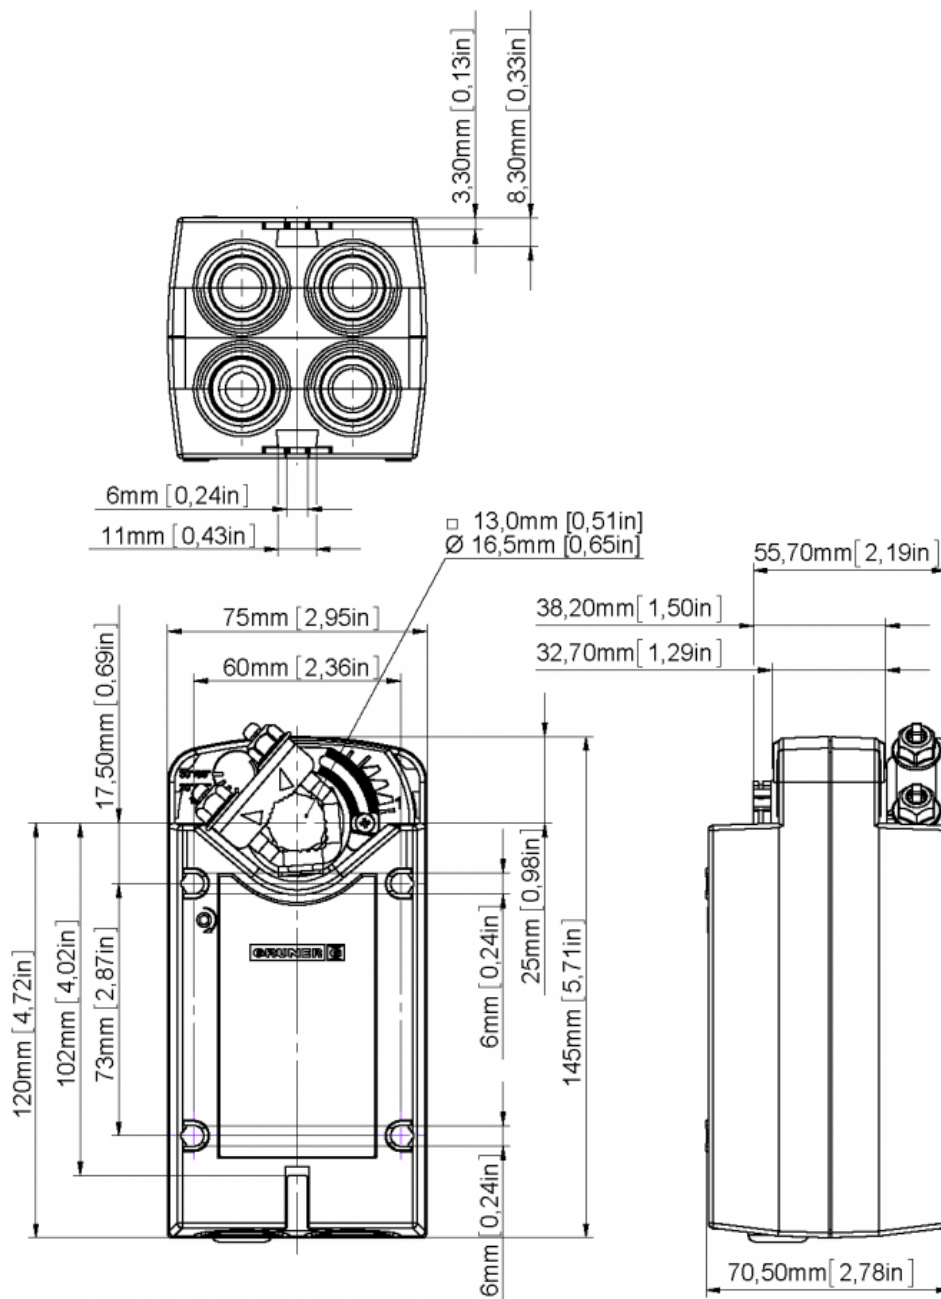



Technical data sheet

341-024-05

Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor **5 Nm**
- Torque Spring **5 Nm**
- Nominal Voltage **24 VAC/DC**
- Control **2 Point**
- Valve size **up to approx 1 m²**
- Damper shaft **Clamp**
 ∅ 13 mm/ Ø 16,5 mm



Technical data

Nominal voltage	Nominal voltage	24 VAC (50/60Hz), 24 VDC
	Nominal voltage range	19...29 VAC/DC
	Power consumption Motor (Motion)	6,5 W
	Power consumption Standby (end position)	2 W
	Wire sizing	9 VA
	Control	2 Point
	Position feedback	-
	Auxiliary switch	-
	Contact load	-
	Switching point	-
	Connection Motor	Cable 1000 mm, 2 x 0,75 mm ² (halogen free)
Functional data	Connection Auxiliary switch	-
	Connection GUAC	-
	Torque Motor	>5 Nm [45 in-lb]
	Torque Spring	>5 Nm [45 in-lb]
	Synchronised speed	±5%
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<75 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<45 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp ∅ 13 mm/ Ø 16,5 mm
	Position indication	mechanical with pointer

Technical data

Functional data	Service life	>60.000 cycles (0°...+95°...0°)
Safety	Protection class	III (low voltage safety current)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	0,8 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C [-22°F...+122°F]
	Storage temperature	-30°C...+80°C [-22°F...176°F]
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
Dimensions/ Weight	Dimensions	145 x 75 x 70 mm [5.71 x 2.95 x 2.76 in]
	Weight	ca. 1.200g [2.65 lb]

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2), the actuator moves to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted the actuator is moving back to position 0 by the spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.


Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override


The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.

Connection / Safety remarks

**Safety remarks**

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

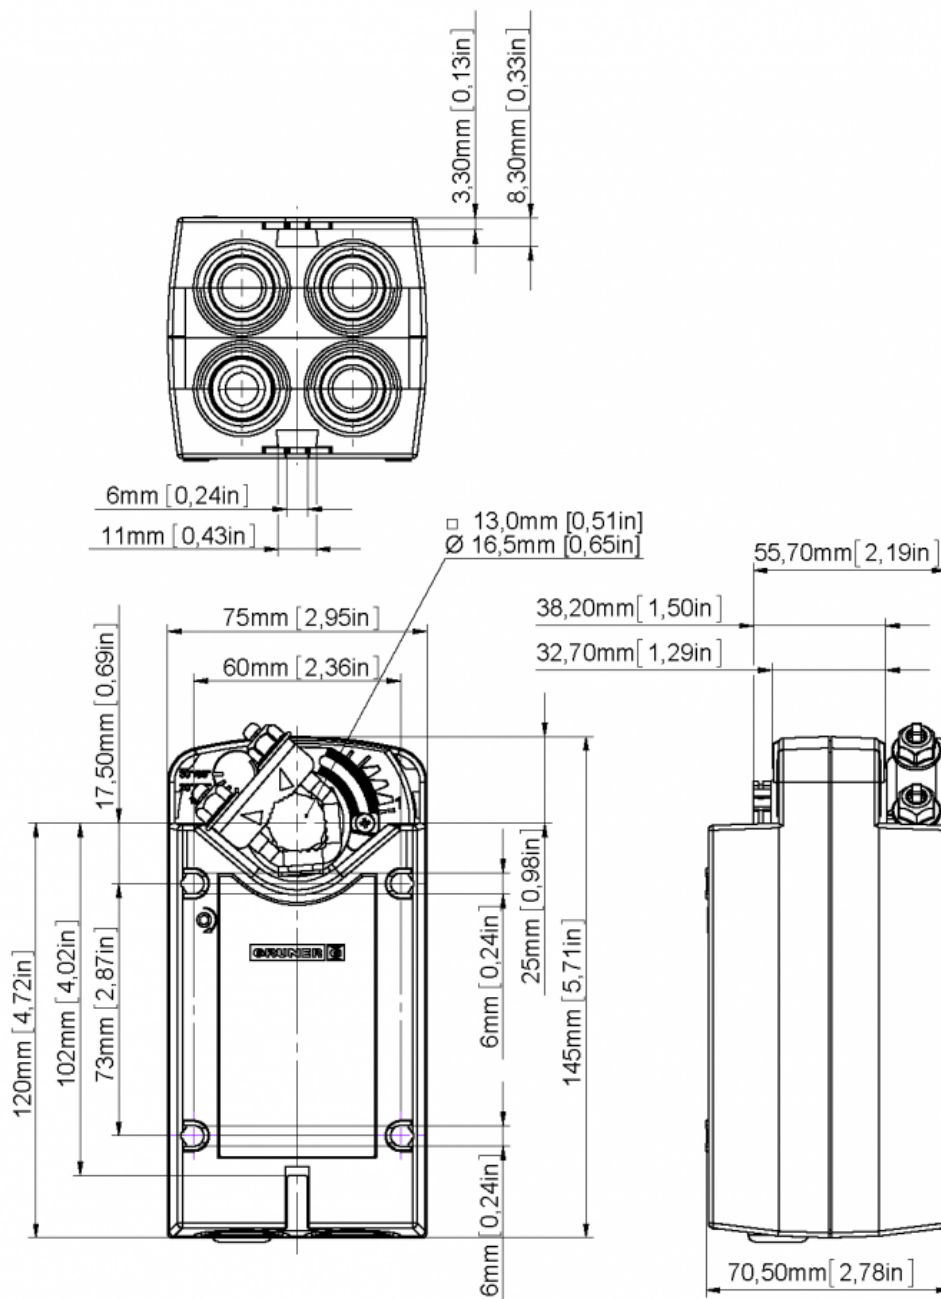



Technical data sheet

341-230-05

Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor 5 Nm
- Torque Spring 5 Nm
- Nominal Voltage 230 VAC/DC
- Control 2- Point
- Valve size up to approx 1 m²
- Damper shaft Clamp
 \varnothing 13 mm/ \varnothing 16,5 mm



Technical data

Nominal voltage	Nominal voltage	230 VAC (50/60Hz), 230 VDC
	Nominal voltage range	85...265 VAC/DC
	Power consumption Motor (Motion)	5,5 W
	Power consumption Standby (end position)	1,5 W
	Wire sizing	9,5 VA
	Control	2 Point
	Position feedback	-
	Auxiliary switch	-
	Contact load	-
	Switching point	-
Functional data	Connection Motor	Cable 1000 mm, 2 x 0,75 mm ² (halogen free)
	Connection Auxiliary switch	-
	Connection GUAC	-
	Torque Motor	>5 Nm [45 in-lb]
	Torque Spring	>5 Nm [45 in-lb]
	Synchronised speed	±5%
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<75 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<45 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp \varnothing 13 mm/ \varnothing 16,5 mm
	Position indication	mechanical with pointer

Technical data

Functional data	Service life	>60.000 cycles (0°...+95°...0°)
Safety	Protection class	II (double insulation)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	4 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C [-22°F...+122°F]
	Storage temperature	-30°C...+80°C [-22°F...+176°F]
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
Dimensions/ Weight	Dimensions	145 x 75 x 70 mm [5.71 x 2.95 x 2.76 in]
	Weight	ca. 1.200g [2.65 lb]

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2), the actuator moves to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted the actuator is moving back to position 0 by the spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.


Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override


The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.

Connection / Safety remarks

**Safety remarks**

- Attention mains voltage
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

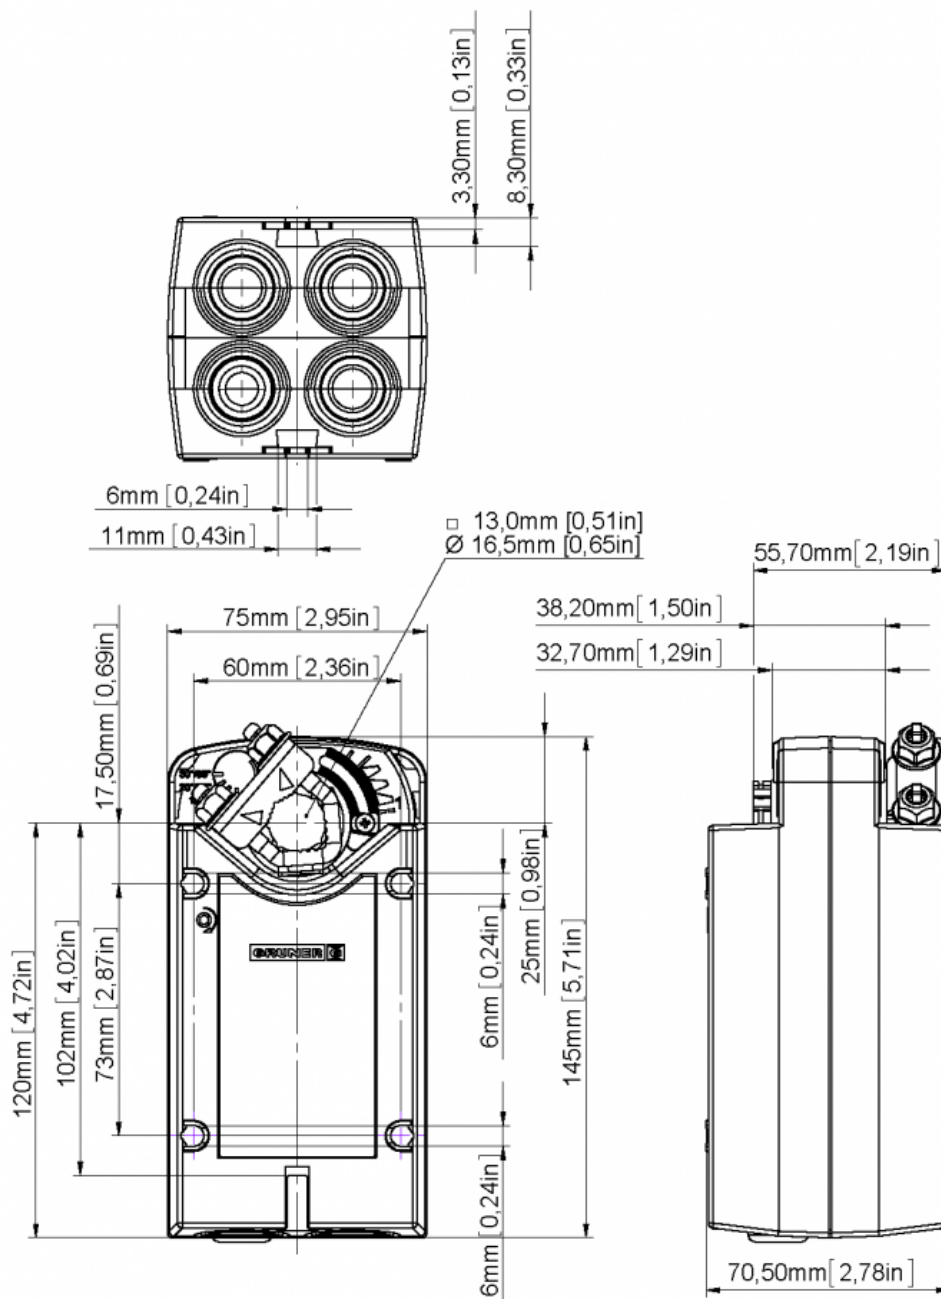



Technical data sheet

341-024-05-S2

Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor 5 Nm
- Torque Spring 5 Nm
- Nominal Voltage 24 VAC/DC
- Control 2- Point
- Auxiliary switch 2x interdependent adjustable
- Damper size up to approx 1 m²
- Damper shaft Clamp
 \varnothing 13 mm/ \varnothing 16,5 mm



Technical data

Nominal voltage	Nominal voltage	24 VAC (50/60Hz), 24 VDC
	Nominal voltage range	19...29 VAC/DC
	Power consumption Motor (Motion)	6,5 W
	Power consumption Standby (end position)	2 W
	Wire sizing	9 VA
	Control	2 Point
	Position feedback	-
	Auxiliary switch	2 x SPDT (Ag)
	Contact load	5 (2,5) A, 250 VAC
	Switching point	0°...30° ~ 65°...95°
	Connection Motor	Cable 1000 mm, 2 x 0,75 mm² (halogen free)
	Connection Auxiliary switch	Cable 1000 mm, 6 x 0,75 mm² (halogen free)
Functional data	Connection GUAC	-
	Torque Motor	>5 Nm
	Torque Spring	>5 Nm
	Synchronised speed	±5%
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<75 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<45 dB(A)

Technical data

Functional data	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp Ø 13 mm/ Ø 16,5 mm
	Position indication	mechanical with pointer
Safety	Service life	>60.000 cycles (0°...+95°...0°)
	Protection class	III (low voltage safety current)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	0,8 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C
Dimensions/ Weight	Storage temperature	-30°C...+80°C
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
	Dimensions	145 x 75 x 70 mm
	Weight	ca. 1.200g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2), the actuator moves to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted the actuator is moving back to position 0 by the spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.

Signaling


The two integrated auxiliary switches are interdependent adjustable (S1: 0°...30° ~ S2: 65°...95°). These are activated corresponding to the adjusted angle. The damper position can be checked by the mechanical pointer.

Direct mounting



Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override

The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.

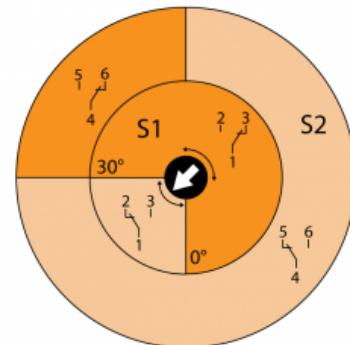


Connection / Safety remarks

**Safety remarks**

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

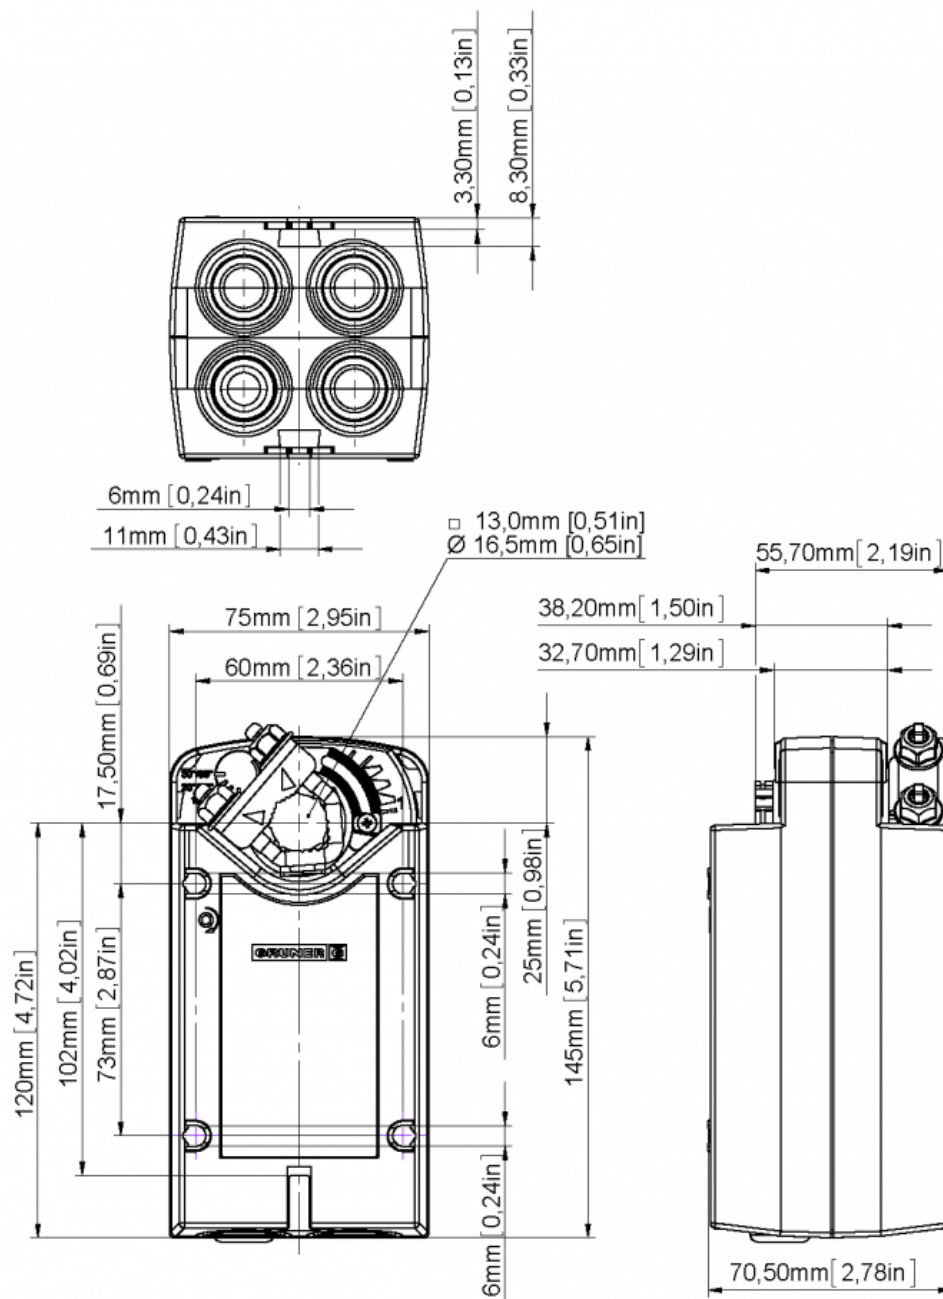



Technical data sheet

341-230-05-S2

Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor 5 Nm
- Torque Spring 5 Nm
- Nominal Voltage 230 VAC/DC
- Control 2- Point
- Auxiliary switch 2x interdependent adjustable
- Valve size up to approx 1 m²
- Damper shaft Clamp
 \varnothing 13 mm/ \varnothing 16,5 mm



Technical data

Nominal voltage	Nominal voltage	230 VAC (50/60Hz), 230 VDC
	Nominal voltage range	85...265 VAC/DC
	Power consumption Motor (Motion)	5,5 W
	Power consumption Standby (end position)	1,5 W
	Wire sizing	9,5 VA
	Control	2 Point
	Position feedback	-
	Auxiliary switch	2 x SPDT (Ag)
	Contact load	5 (2,5) A, 250 VAC
	Switching point	0°...30° ~ 65°...95°
Functional data	Connection Motor	Cable 1000 mm, 2 x 0,75 mm² (halogen free)
	Connection Auxiliary switch	Cable 1000 mm, 6 x 0,75 mm² (halogen free)
	Connection GUAC	-
	Torque Motor	>5 Nm
	Torque Spring	>5 Nm
	Synchronised speed	±5%
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<75 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<45 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp \varnothing 13 mm/ \varnothing 16,5 mm
	Position indication	mechanical with pointer

Technical data

Functional data	Service life	>60.000 cycles (0°...+95°...0°)
Safety	Protection class	II (double insulation)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	4 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C
	Storage temperature	-30°C...+80°C
Dimensions/ Weight	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
	Dimensions	145 x 75 x 70 mm
	Weight	ca. 1.200g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2), the actuator moves to position 1 while the pre-tensioned spring is wound up the same time. If the power supply is interrupted the actuator is moving back to position 0 by the spring power. The actuator is still maintaining the minimum torque at the damper spindle.

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.

Signaling


The two integrated auxiliary switches are interdependent adjustable (S1: 0°...30° ~ S2: 65°...95°). These are activated corresponding to the adjusted angle. The damper position can be checked by the mechanical pointer.

Direct mounting



Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override

The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.




Connection / Safety remarks

**Safety remarks**

- Attention mains voltage
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

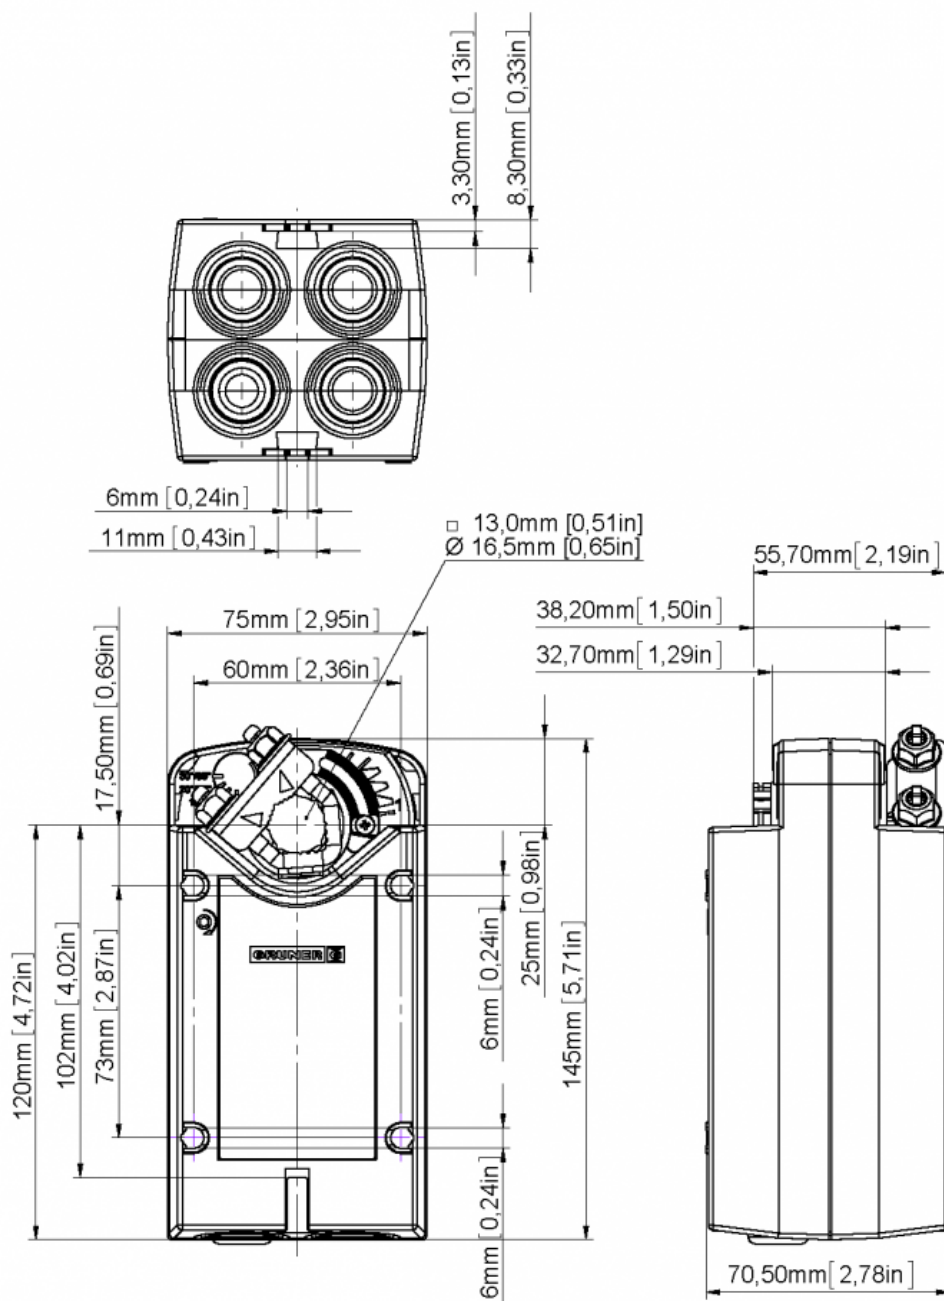



Technical data sheet

341C-024-05

Continuous control of Spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor 5 Nm
- Torque Spring 5 Nm
- Nominal Voltage 24 VAC/DC
- Control Continuous 0(2)...10 VDC
- Valve size up to approx 1 m²
- Damper shaft Clamp
 \varnothing 13 mm/ \varnothing 16,5 mm



Technical data

Nominal voltage	Nominal voltage	24 VAC (50/60Hz), 24 VDC
	Nominal voltage range	19...29 VAC/DC
	Power consumption Motor (Motion)	6,5 W
	Power consumption Standby (end position)	2,0 W
	Wire sizing	7,5 VA
	Control	Continuous 0(2)...10 VDC / Ri >100 k Ω 0(4)...20 mA / Rext.=500 Ω
	Position feedback	0(2)...10VDC, max. 5 mA
	Auxiliary switch	-
	Contact load	-
	Switching point	-
	Connection Motor	Cabel 1000 mm, 4 x 0,75 mm ² (halogen free)
	Connection Auxiliary switch	-
	Connection GUAC	-
Functional data	Torque Motor	>5 Nm
	Torque Spring	>5 Nm
	Synchronised speed	\pm 5%
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40° Adaption of operating range to match the mechanical angle of rotation
	Running time Motor	<100 s / 90°
	Running time Spring	<20 s / 90°

Technical data

Functional data	Sound power level Motor	<35 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp Ø 13 mm/ Ø 16,5 mm
	Position indication	mechanical with pointer
	Service life	>60'000 cycles (0° - 95° - 0°) >1'000'000 partial cycles (max. ±5°)
Safety	Protection class	III (low voltage safety current)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	0,8 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C
	Storage temperature	-30°C...+80°C
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
Dimensions/ Weight	Maintenance	maintenance-free
	Dimensions	145 x 75 x 70 mm
	Weight	ca. 1.200g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2) and a reference signal Y to BK (3) of 0(2)...10VDC, moves the actuator to its specified position. The actual damper position 0...100% is a feedback signal U for example to share the signal with other actuators. If the power supply is interrupted the actuator is moving to position 0 by spring power. The actuator is still maintaining the minimum torque at the damper spindle

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.

Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.


Manual override

The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.


Mode- switch

Mode switch with four rest positions at the housing

- Rotary direction Normal 2-10 V
- Rotary direction Normal 0-10 V
- Rotary direction invers 2-10 V
- Rotary direction invers 0-10 V




Connection / Safety remarks

**Safety remarks**

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

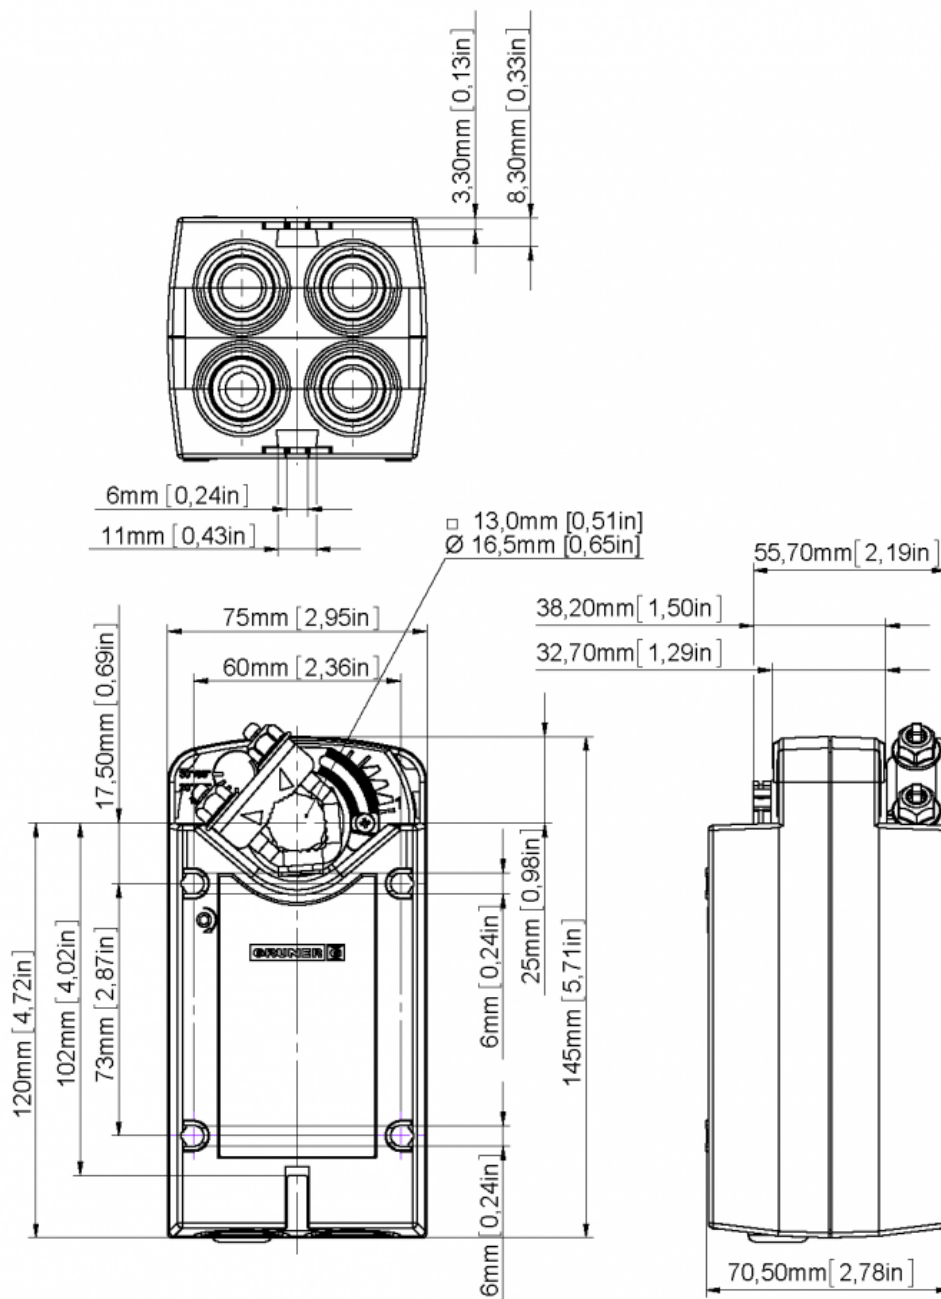



Technical data sheet

341C-024-05-S2

Continuous control of spring return

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation.

- Torque Motor 5 Nm
- Torque Spring 5 Nm
- Nominal Voltage 24 VAC/DC
- Control Continuous 0(2)...10 VDC
- Valve size up to approx 1 m²
- Damper shaft Clamp
 \varnothing 13 mm/ \varnothing 16,5 mm



Technical data

Nominal voltage	Nominal voltage	24 VAC (50/60Hz), 24 VDC
	Nominal voltage range	19...29 VAC/DC
	Power consumption Motor (Motion)	6,5 W
	Power consumption Standby (end position)	2,0 W
	Wire sizing	7,5 VA
	Control	Continuous 0(2)...10 VDC / Ri > 100 k Ω 0(4)...20 mA / Rext. = 500 Ω
	Position feedback	0(2)...10VDC, max. 5 mA
	Auxiliary switch	2 x SPDT (Ag)
	Contact load	5 (2,5) A, 250 VAC
	Switching point	0°...30° ~ 65°...95°
	Connection Motor	Cabel 1000 mm, 4 x 0,75 mm ² (halogenfree)
	Connection Auxiliary switch	Cabel 1000 mm, 6 x 0,75 mm ² (halogen free)
Functional data	Connection GUAC	-
	Torque Motor	>5 Nm
	Torque Spring	>5 Nm
	Synchronised speed	±5%
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40° Adaption of operating range to match the mechanical angle of rotation
	Running time Motor	<100 s / 90°

Technical data

Functional data	Running time Spring	<20 s / 90°
	Sound power level Motor	<35 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp ∅ 13 mm/ ∅ 16,5 mm
	Position indication	mechanical with pointer
	Service life	>60'000 cycles (0° - 95° - 0°) >1'000'000 partial cycles (max. ±5°)
Safety	Protection class	III (low voltage safety current)
	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	0,8 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C
	Storage temperature	-30°C...+80°C
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
Dimensions/ Weight	Dimensions	145 x 75 x 70 mm
	Weight	ca. 1.200g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2) and a reference signal Y to BK (3) of 0(2)...10VDC, moves the actuator to its specified position. The actual damper position 0...100% is a feedback signal U for example to share the signal with other actuators. If the power supply is interrupted the actuator is moving to position 0 by spring power. The actuator is still maintaining the minimum torque at the damper spindle

The actuator is overload-proof and requires no end switches. It automatically stops when the end stop is reached.

Signaling

The two integrated auxiliary switches are interdependent adjustable (S1: 0°...30° ~ S2: 65°...95°). These are activated corresponding to the adjusted angle. The damper position can be checked by the mechanical pointer.

Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.



Manual override

The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.


Mode- switch

Mode switch with four rest positions at the housing

- Rotary direction Normal 2-10 V
- Rotary direction Normal 0-10 V
- Rotary direction invers 2-10 V
- Rotary direction invers 0-10 V




Connection / Safety remarks

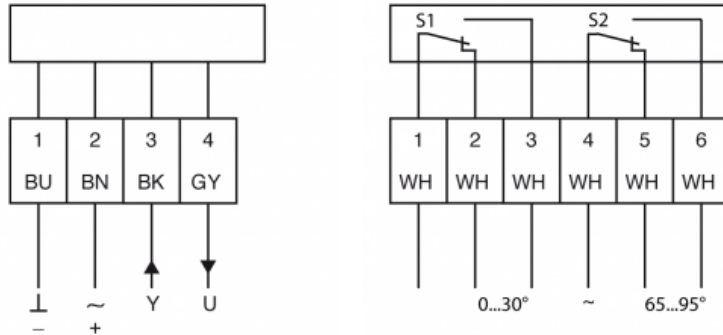**Safety remarks**

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

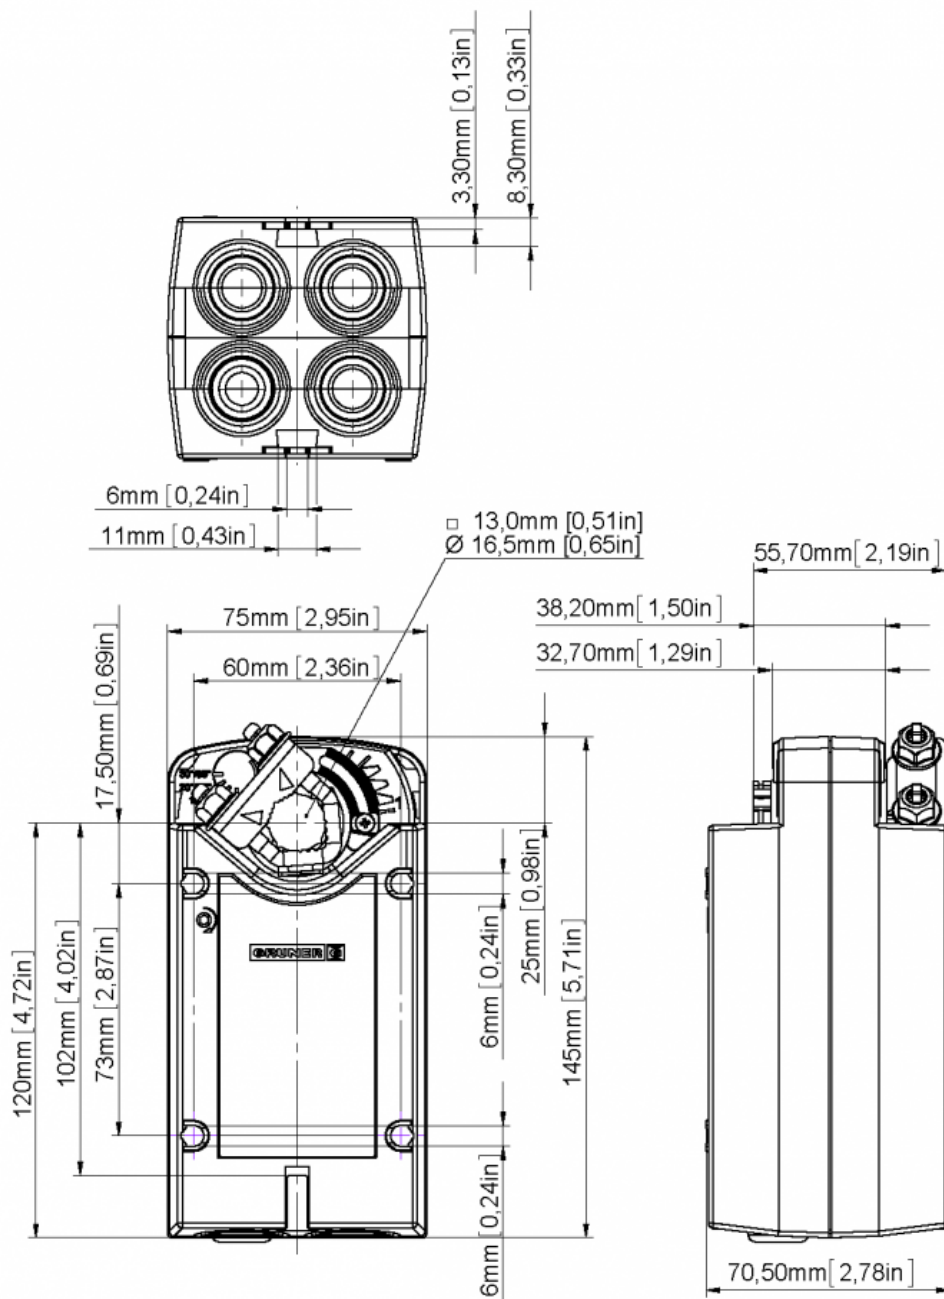



Technical data sheet

341C-024-05-V

**Spring-return actuator
for flow- or pressure control
with GUAC**

Description

Spring-return Actuator for adjusting and regulating dampers and valves in air conditioning and ventilation in conjunction with GUAC for volume - or pressure control.

- Torque Motor 5 Nm
- Torque Spring 5 Nm
- Nominal Voltage 24 VAC/DC
- Control 6 ± 4 VDC (GUAC)
- Valve size up to approx 1 m²
- Damper shaft Clamp
 ∅ 13 mm/ Ø 16,5 mm



Technical data

Nominal voltage	Nominal voltage	24 VAC (50/60Hz), 24 VDC
	Nominal voltage range	19...29 VAC/DC
	Power consumption Motor (Motion)	6,5 W
	Power consumption Standby (end position)	2,0 W
	Wire sizing	7,5 VA
	Control	6 ± 4 VDC (GUAC)
	Position feedback	0(2)...10VDC, max. 5 mA
	Auxiliary switch	-
	Contact load	-
	Switching point	-
	Connection Motor	-
Functional data	Connection Auxiliary switch	-
	Connection GUAC	Cable 1000 mm with Phoenix connector
	Torque Motor	>5 Nm
	Torque Spring	>5 Nm
	Synchronised speed	±5%
	Direction of rotation	selected by mounting
	Manual override	Manual operation
	Angle of rotation	0°...max.+95° Can be limited with adjustable mechanical end stop min 40°
	Running time Motor	<100 s / 90°
	Running time Spring	<20 s / 90°
	Sound power level Motor	<35 dB(A)
	Sound power level Spring	<65 dB(A)
	Damper coupling	Clamp ∅ 13 mm/ Ø 16,5 mm
	Position indication	mechanical with pointer

Technical data

Functional data	Service life	>60'000 cycles (0° - 95° - 0°) >1'000'000 partial cycles (max. ±5°)
	Protection class	III (low voltage safety current)
Safety	Degree of protection	IP54
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1.AA B (EN60730-1)
	Rated impulse voltage	0,8 kV (EN60730-1)
	Control pollution degree	3 (EN60730-1)
	Ambient temperature Normal operation	-30°C...+50°C
	Storage temperature	-30°C...+80°C
	Ambient humidity	5...95% r.F., not condensing (EN 60730-1)
	Maintenance	maintenance-free
Dimensions/ Weight	Dimensions	145 x 75 x 70 mm
	Weight	ca. 1.200g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2) with a standard signal Y to BK (3) of 6 ± 4 VDC (GUAC), moves the actuator to its specified position. The actual damper position 0...100% is provided as a feedback signal U. If the power supply is interrupted the actuator is moving to position 0 by spring power. The actuator is still maintaining the minimum torque at the damper spindle

The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Direct connection (GUAC)

Simple direct mounting to the actuator used by Phoenix - plug - connection.


assembly (GUAC)

Easily attach with mounting tabs on the device.

Manual override

The actuator can be operated only manually while the power supply is off. The supplied lever is to open and lock the damper position. The lock stays until the power supply is put on.

Connection / Safety remarks

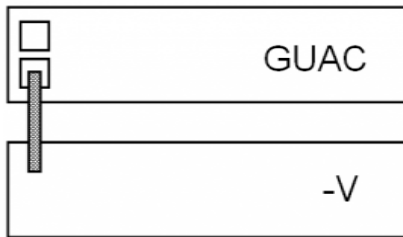**Safety remarks**

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

